



Serie QRTRAD



RADIAL ROTATIONAL DIFFUSER



(+34) 91 3235805
(+34) 91 3235703



www.difair.es



info@difair.es




Avd. del Cno de lo Cortao, 28A, Nave 1
28703 San Sebastián de los Reyes, Madrid.

RADIAL ROTATIONAL DIFFUSER SERIE QRTRAD


MODELS

Radial rotational diffuser made of sheet steel 595 x 595 mm, white lacquered.


QRTRAD100

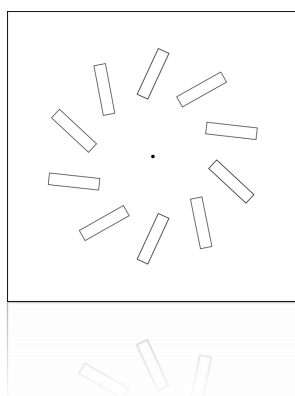


QRTRAD200

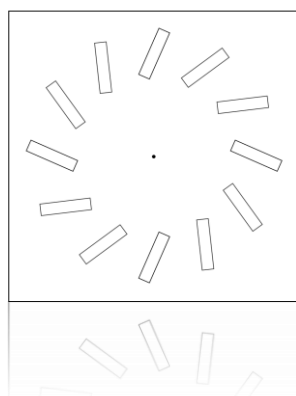


QRTRAD300

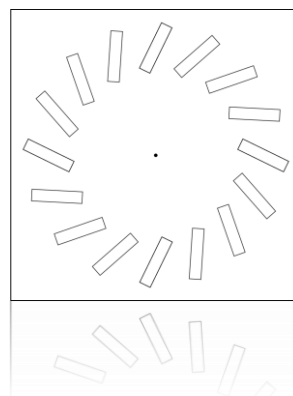


QRTRAD400

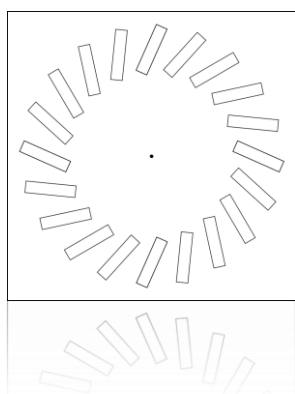


QRTRAD500

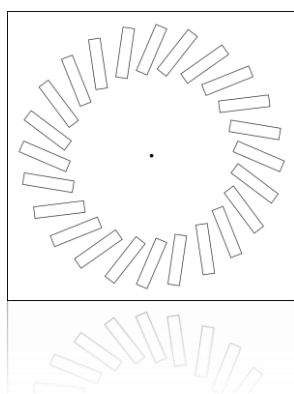


QRTRAD600

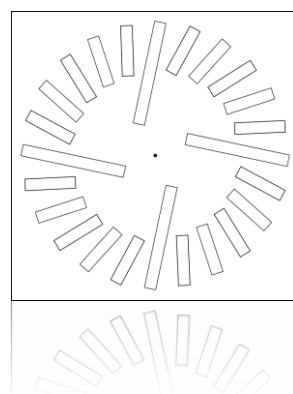

QRTRAD800

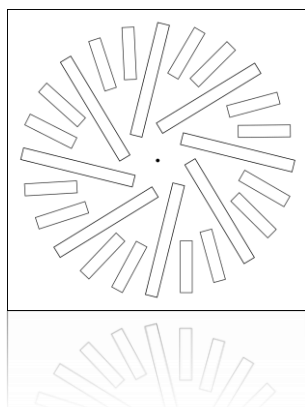

QRTRAD1000

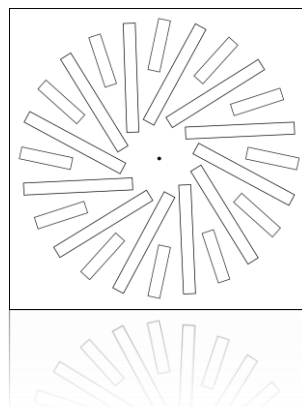

APPLICATION




Our radial swirl / rotational diffusers are designed for air distribution in rooms with heights between 2.80 and 4 m. They are suitable for ventilation, heating and cooling installations.

They are particularly suitable where there is a danger of hot air stratification. This is due to the arrangement of the drive slots and the design of the rotating blade, which gives it a high induction power.

This minimizes the temperature difference between the air under the ceiling and the air above the floor.

Swirl / rotational diffusers are also recommended when it is necessary to be able to vary or fix the horizontal or vertical discharge. Thanks to their rotating blades, they can be positioned according to what is of interest in each case or in each season of the year. They can even be used for mixed air supply, with the outer slots being horizontal and the inner slots vertical.

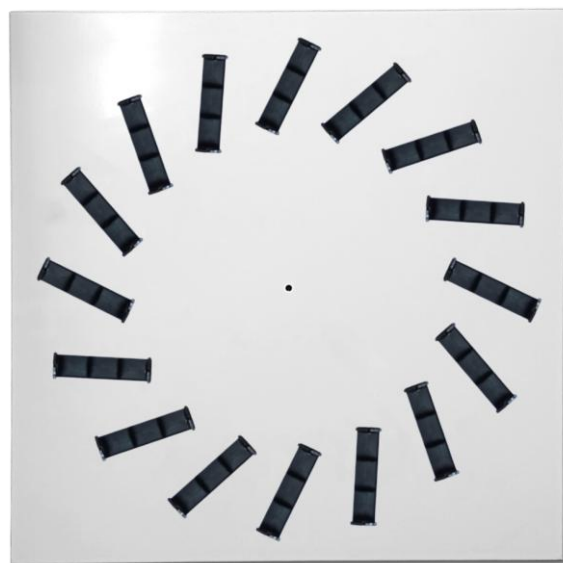

RADIAL ROTATIONAL DIFFUSER SERIE QRTRAD

ACCESSORIES

- Mounting crossbar.
- Polystyrene plenum with regulation and equalizer plate.
- Insulated sheet metal plenum with adjustment and equalizer plate.
- Uninsulated sheet metal plenum with regulation and equalizer plate.

FINISH (Diffuser)


- **WHITE LACQUERED** rotational diffuser.
- On request, it can be manufactured in other colors of the **RAL CHART**.

FINISH (Blades)

- Plastic blades in **BLACK (STANDARD)**.

AIR IMPULSE DIRECTION

Depending on the arrangement of the blades, we will achieve different effects in the air impulsion.

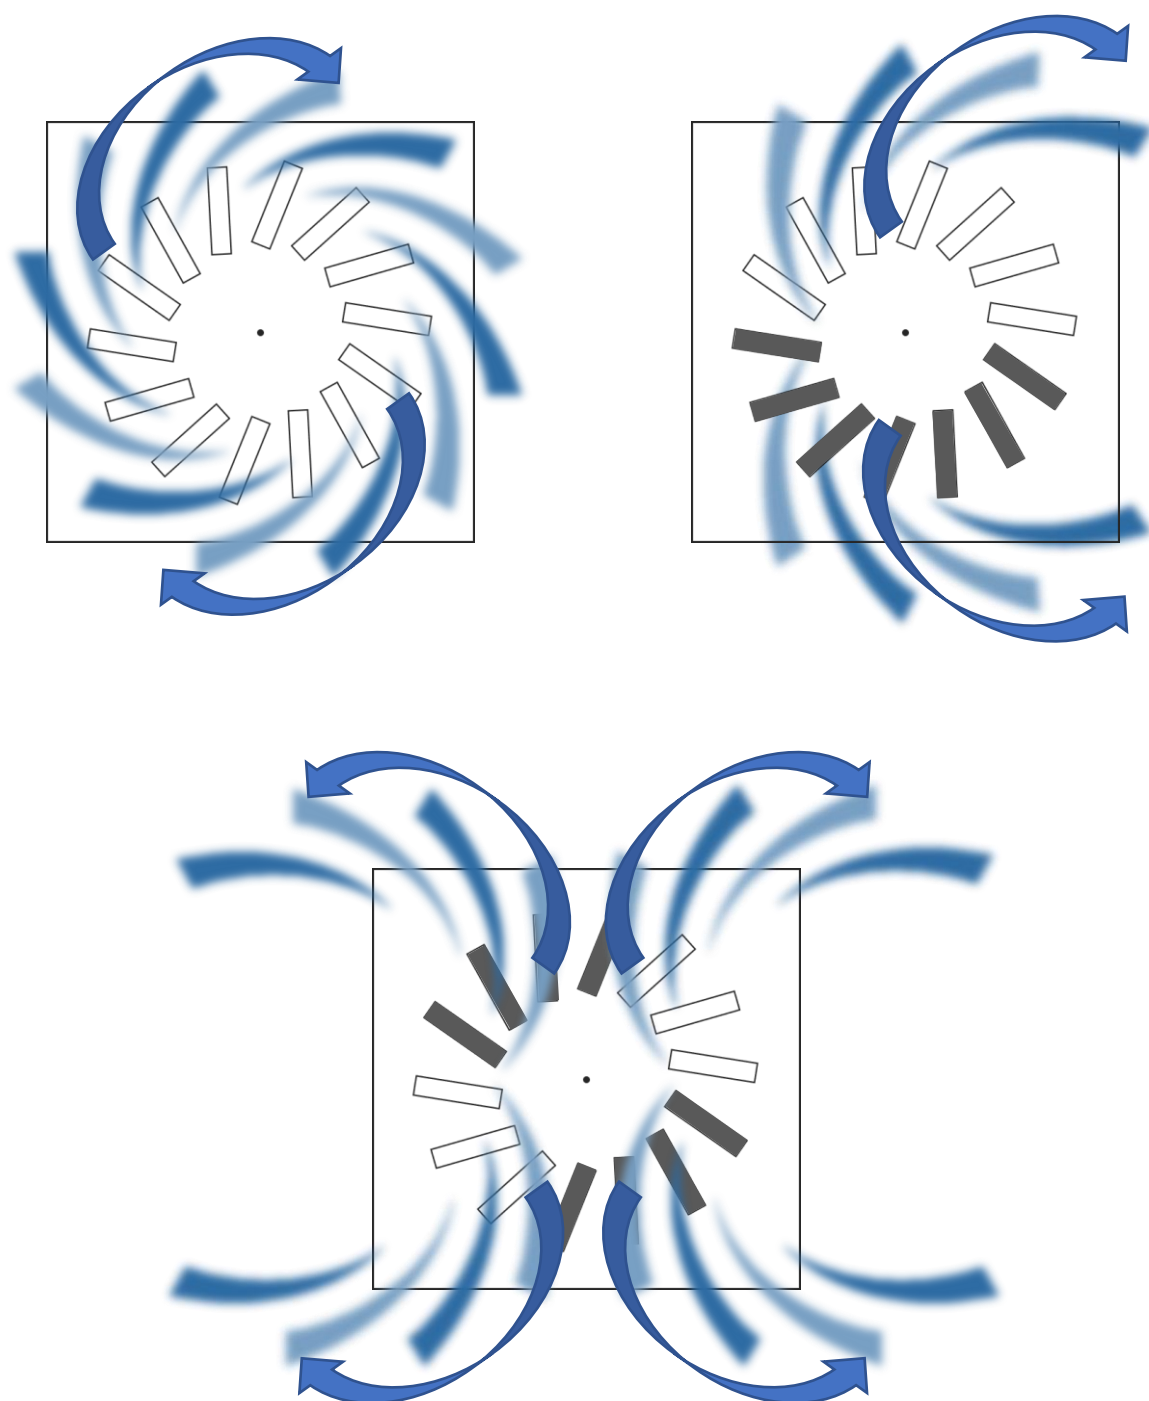

CONSTRUCTION FEATURES AND DIMENSIONS


QRT-RAD DIFFUSER

Our QRT-RAD diffuser is made of galvanized sheet steel, epoxy painted. The blades are made of ABS plastic in black color.

Its special design provides a perfect integration in modular ceilings.

All this, together with their modern aesthetics, give the installations a very attractive finish.

The diffuser is installed to the false ceiling by means of a central screw, either to the mounting crossbar or to the plenum (made of sheet metal or polystyrene).

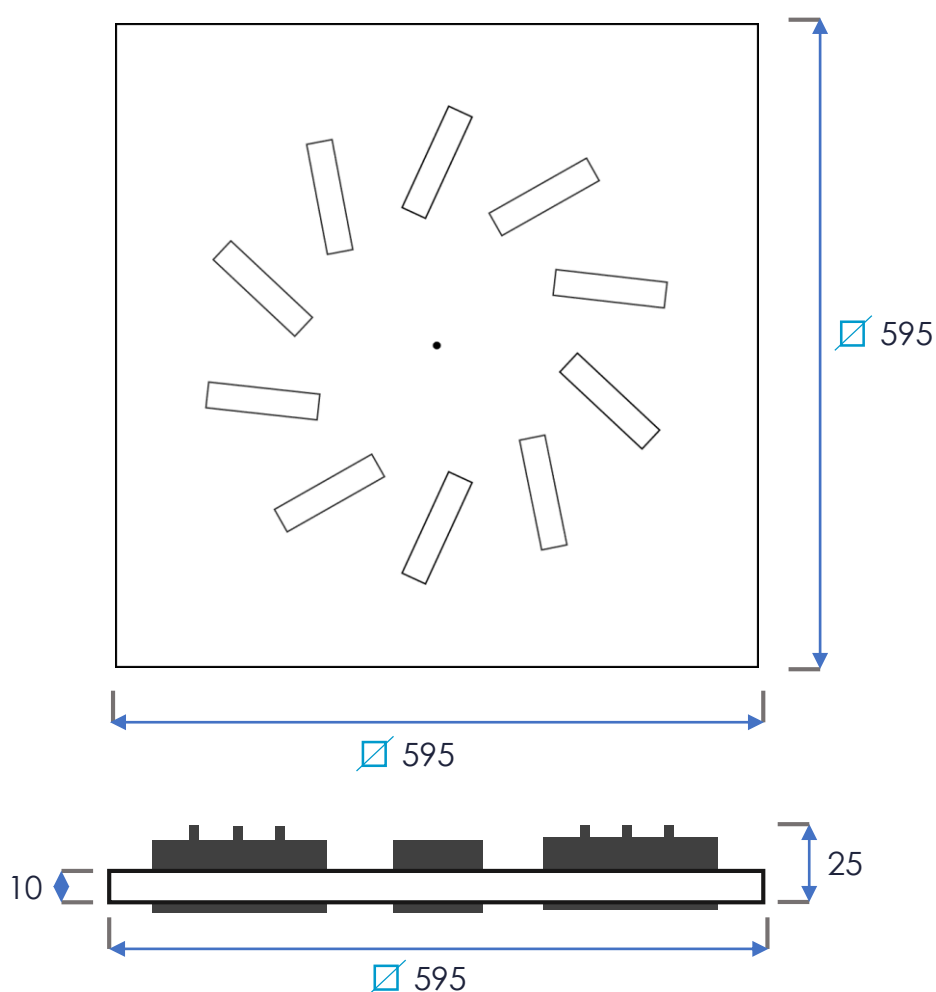


RADIAL ROTATIONAL DIFFUSER SERIE QRTRAD

PLENUM (PLER y PLERAIS)

Made of galvanized steel sheet, insulated (PLERAIS) or uninsulated (PLER), they are specially designed to adapt to our rotational diffuser.


They are equipped with equalizing plate and regulating damper in the connection port.

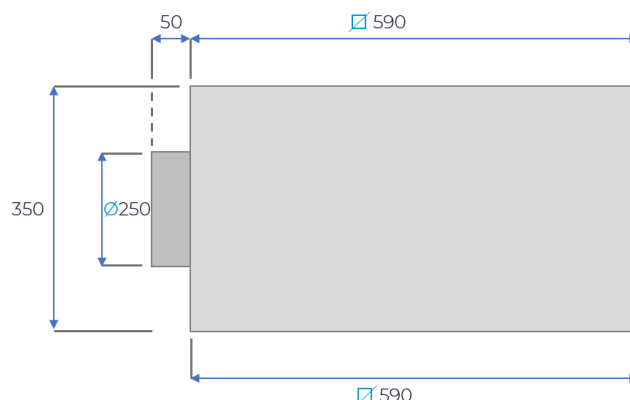

POLYSTYRENE PLENUM (PRPE)

The polystyrene plenum (PRPE) is made of printed polystyrene, with a density of 45 Kg/mc, class 1 fireproof and crystallized on the inside. The transformation process, together with the characteristics of the material, make PRPE a compact and lightweight plenum.

Designed to be used with panel diffusers or grilles of nominal dimensions 595x595mm, in standard version, it is supplied with connection port for flexible duct "C" (in sizes DN Ø150, Ø160, Ø200 and Ø 250), with adjustment damper with lever control to regulate the air flow and air equalizer plate.

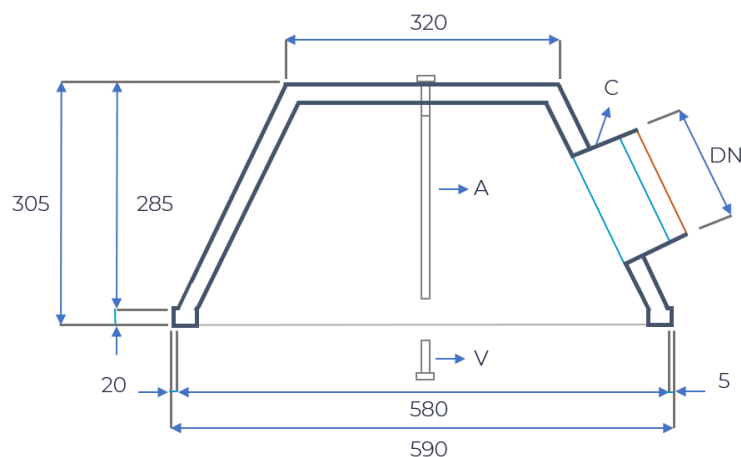


RADIAL ROTATIONAL DIFFUSER SERIE QRTRAD

INSTALLATION DETAILS


INSTALLATION DETAIL BY MEANS OF PLENUM BOX (PLER Y PLERAIS)

The plenum will be suspended from the floor slab by means of threaded rods or steel cables specially designed for this purpose.

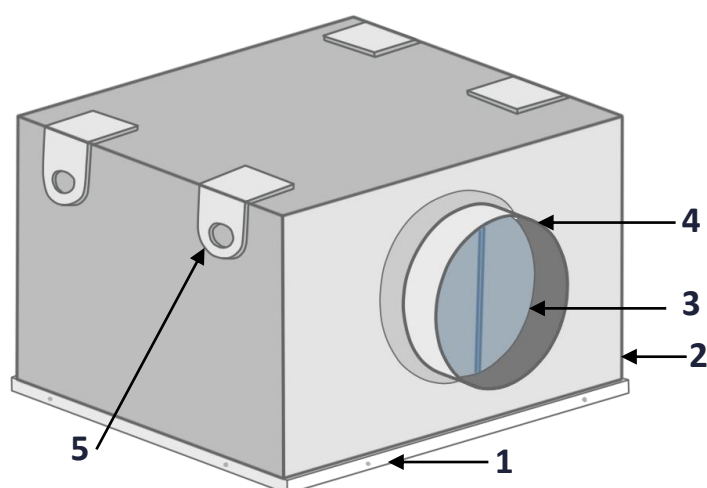


- 1. Rotational diffuser.
- 2. Plenum box.
- 3. Regulation at the connection port.
- 4. Connection port.

- 5. Hanging cards.
- 6. Caged nut.
- 7. Fixing strap.
- 8. Equalizer plate.

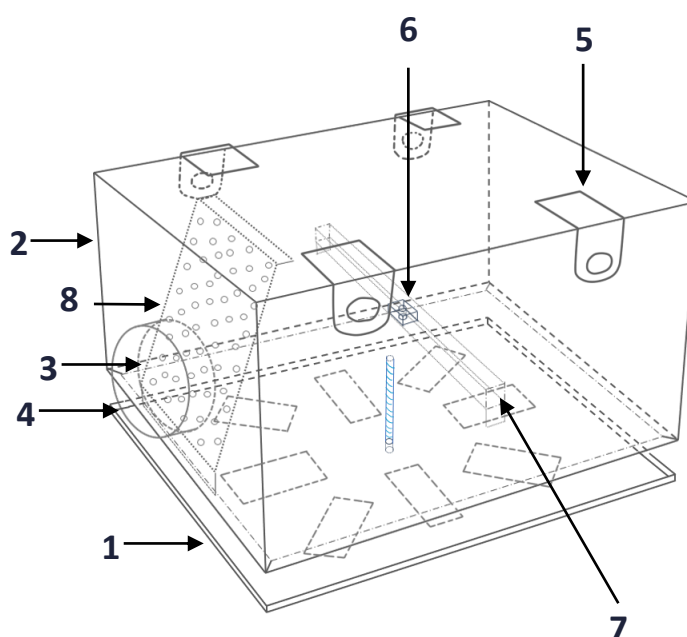

POLYSTYRENE PLENUM BOX INSTALLATION DETAIL (PRPE)



Fixing: Once the diffuser has been fixed to the plenum by means of the screw to the central post, the plenum can be positioned on the false ceiling structure (see PRPE SERIES data sheet).

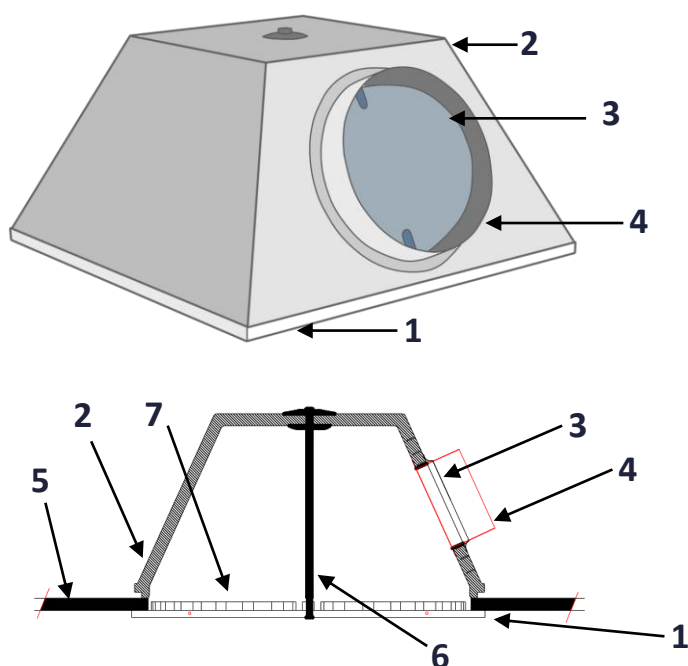

- 1. Rotational diffuser.
- 2. Plenum box.
- 3. Regulation at the connection port.
- 4. Connection port.
- 5. Ceiling.
- 6. Screw and central post.
- 7. Movable blades.

CROSSBAR INSTALLATION DETAIL (PMR)

- 1. Movable blades.
- 2. Ceiling mounting crossbar without plenum.
- 3. Screw for crossbar.
- 4. Ceiling.

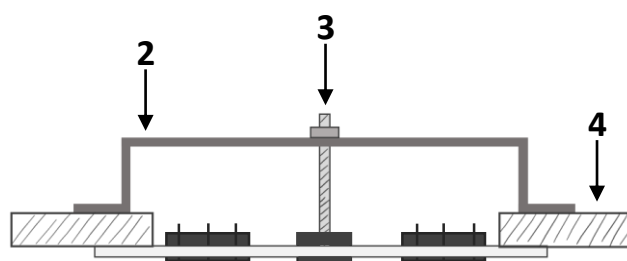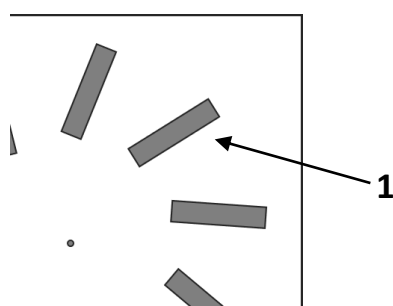

RADIAL ROTATIONAL DIFFUSER SERIE QRTRAD

QUICK SELECTION TABLE

Q (m³/h)	Model		QRTRAD 100			QRTRAD 200			QRTRAD 300			QRTRAD 400			QRTRAD 500			QRTRAD 600			QRTRAD 800			QRTRAD 1000								
	Diffuser center-to-center distance (m)		1,2	1,8	2,7	1,2	1,8	2,7	1,2	1,8	2,7	1,2	1,8	2,7	1,2	1,8	2,7	1,2	1,8	2,7	1,2	1,8	2,7	1,2	1,8	2,7						
50	Speed in occupied zone	H = 2,7 m	0,03	0,04	0,03																											
		H = 3,2 m	0,02	0,02	0,02																											
		H = 3,8 m	0,02	0,02	0,01																											
	Total ΔP (Pa)		2																													
	Sound level (dB)		< 15																													
150	Speed in occupied zone	H = 2,7 m	0,11	0,12	0,10	0,09	0,11	0,08	0,08	0,09	0,07																					
		H = 3,2 m	0,07	0,08	0,06	0,06	0,07	0,05	0,05	0,06	0,04																					
		H = 3,8 m	0,05	0,05	0,05	0,04	0,05	0,03	0,03	0,04	0,03																					
	Total ΔP (Pa)		16			4			3																							
	Sound level (dB)		25			< 15			< 15																							
250	Speed in occupied zone	H = 2,7 m	0,18	0,20	0,17	0,14	0,18	0,13	0,13	0,15	0,12	0,11	0,13	0,10																		
		H = 3,2 m	0,12	0,13	0,11	0,09	0,12	0,08	0,08	0,10	0,07	0,07	0,08	0,07																		
		H = 3,8 m	0,08	0,09	0,08	0,06	0,08	0,06	0,06	0,07	0,05	0,05	0,06	0,05																		
	Total ΔP (Pa)		45			12			7			3																				
	Sound level (dB)		41			29			19			< 15																				
350	Speed in occupied zone	H = 2,7 m				0,20	0,26		0,18	0,21	0,16	0,15	0,19	0,15	0,15	0,18	0,13	0,14	0,17	0,12	0,13	0,16	0,11									
		H = 3,2 m				0,13	0,16		0,12	0,14	0,10	0,10	0,12	0,09	0,10	0,11	0,09	0,09	0,11	0,08	0,08	0,10	0,07									
		H = 3,8 m				0,09	0,11	0,08	0,08	0,09	0,07	0,07	0,08	0,06	0,07	0,08	0,06	0,06	0,07	0,05	0,06	0,07	0,05									
	Total ΔP (Pa)					23			14			7			6			6			5											
	Sound level (dB)					38			28			20			17			16			< 15											
500	Speed in occupied zone	H = 2,7 m				0,29	0,36	0,25	0,26	0,31	0,23	0,22	0,27	0,21	0,21	0,25	0,19	0,20	0,24	0,18	0,18	0,22	0,16	0,16	0,17	0,13						
		H = 3,2 m				0,18	0,23	0,16	0,17	0,19	0,15	0,14	0,17	0,13	0,14	0,16	0,12	0,13	0,15	0,11	0,11	0,14	0,10	0,10	0,11	0,08						
		H = 3,8 m				0,13	0,16	0,11	0,12	0,13	0,10	0,10	0,12	0,09	0,10	0,11	0,09	0,09	0,10	0,08	0,08	0,10	0,07	0,07	0,07	0,06						
	Total ΔP (Pa)					47			28			13			12			11			10			4								
	Sound level (dB)					48			38			30			27			26			24			< 15								
650	Speed in occupied zone	H = 2,7 m							0,34	0,40	0,30	0,28	0,35	0,27	0,28	0,33	0,25	0,27	0,30	0,23	0,24	0,28	0,21	0,21	0,22	0,18						
		H = 3,2 m							0,22	0,25	0,19	0,18	0,22	0,17	0,18	0,20	0,16	0,17	0,19	0,15	0,15	0,18	0,13	0,13	0,14	0,11						
		H = 3,8 m							0,15	0,18	0,13	0,12	0,15	0,12	0,12	0,14	0,11	0,12	0,13	0,10	0,10	0,12	0,09	0,09	0,10	0,08						
	Total ΔP (Pa)					48			23			20			19			18			8											
	Sound level (dB)					46			37			35			34			32			21											
800	Speed in occupied zone	H = 2,7 m										0,35	0,43	0,33	0,34	0,41	0,31	0,33	0,37	0,28	0,29	0,35	0,25	0,26	0,27	0,22						
		H = 3,2 m										0,22	0,27	0,21	0,22	0,25	0,19	0,21	0,24	0,18	0,18	0,22	0,16	0,16	0,17	0,14						
		H = 3,8 m										0,15	0,19	0,15	0,15	0,18	0,14	0,14	0,16	0,12	0,13	0,15	0,11	0,11	0,12	0,09						
	Total ΔP (Pa)								34			30			29			27			11											
	Sound level (dB)								43			42			42			39			37			27								
900	Speed in occupied zone	H = 2,7 m													0,38	0,47	0,35	0,37	0,42	0,32	0,34	0,41	0,29	0,31	0,32	0,25						
		H = 3,2 m													0,19	0,31	0,22	0,25	0,29	0,21	0,22	0,27	0,19	0,19	0,19	0,16						
		H = 3,8 m													0,17	0,22	0,17	0,16	0,21	0,15	0,16	0,18	0,13	0,13	0,14	0,11						
	Total ΔP (Pa)											35			29			27			27			19								
	Sound level (dB)											42			40			39			39			32								
1000	Speed in occupied zone	H = 2,7 m																0,41	0,46	0,35	0,37	0,43	0,32	0,33	0,34	0,27						
		H = 3,2 m																0,26	0,29	0,22	0,23	0,27	0,2	0,2	0,21	0,17						
		H = 3,8 m																0,18	0,2	0,15	0,16	0,19	0,14	0,14	0,15	0,12						
	Total ΔP (Pa)														45			41			18											
	Sound level (dB)														46			44			33											
1250	Speed in occupied zone	H = 2,7 m																									0,41	0,42	0,34			
		H = 3,2 m																									0,26	0,26	0,21			
		H = 3,8 m																									0,18	0,18	0,15			
	Total ΔP (Pa)																										28					
	Sound level (dB)																										39					
1600	Speed in occupied zone	H = 2,7 m																												0,52	0,54	0,44
		H = 3,2 m																												0,33	0,34	0,28
		H = 3,8 m																												0,23	0,23	0,19
	Total ΔP (Pa)																													46		
	Sound level (dB)																													46		

RADIAL ROTATIONAL DIFFUSER

SERIE QRTRAD

Serie	Model		Finish	Accessories
	100	500	LB	PM
QRTRAD	200	600	RAL	PLER
	300	800		PLERAIS
	400	1000		PRPE

QRT200 – LB + PM

DESCRIPTION

SERIE

- QRTRAD: Radial rotational diffuser.

MODEL

- QRTRAD200: Radial rotational diffuser, size 200.

MEASUREMENTS (mm)

- LxH: 595 x 595 mm (standard).

FINISH

- LB: White lacquered.

ACCESSORIES (optional)

- PM: Mounting crossbar.

Order example: QRTRAD200-LB+PM

- To order a radial rotational diffuser, model 200, white lacquered with crossbar, you should request:

Order	Description
1 Diffuser QRTRAD 200-LB	Radial rotational diffuser, model 200, white lacquered.
1 Crossbar PMR	Mounting crossbar for QRT-RAD

Order example: QRTRAD300-LB + PLER

- To order a radial rotational diffuser, model 300, white lacquered and uninsulated sheet metal plenum box with air regulation in connection port, you should request:

Order	Description
1 Diffuser QRTRAD300-LB	Radial rotational diffuser, model 300, white lacquered.
1 Plenum box PLER	uninsulated sheet metal plenum box with air regulation in connection port



Any element of this document may be subject to change without notice from Manufacturas Difair-Clima, S.L. CONTAINS INTELLECTUAL PROPERTY. Any partial or total reproduction of the contents without the express authorization of Manufacturas DIFAIR-CLIMA, S.L. is prohibited.

The information contained in this document is based on careful testing and experience. It reflects our knowledge and is for guidance purposes only. It is provided in good faith and the user should satisfy himself that the product is fit for use prior to any application. The values quoted are averages and should not be taken as maximum or minimum values for specific purposes. The manufacturer and distributor are not responsible for any non-recommended use or consequential damage.

THE INFORMATION PROVIDED IN THIS DOCUMENT SUPERSEDES ALL PREVIOUS VERSIONS OF THIS DOCUMENT.



(+34) 91 3235805
(+34) 91 3235703



www.difair.es



info@difair.es



Manufacturas Difair-Clima, S.L.
Avd. del Cno de lo Cortao, 28A, Nave 1
28703 San Sebastián de los Reyes, Madrid.